


P/N 16058

Configuration: DB 15 Female to Dual RJ-45

Type BP

Application: Marty SR-40A Receiver
 Mono Balanced Audio Output (to RJ-45A)
 Remote Control (to RJ-45B)

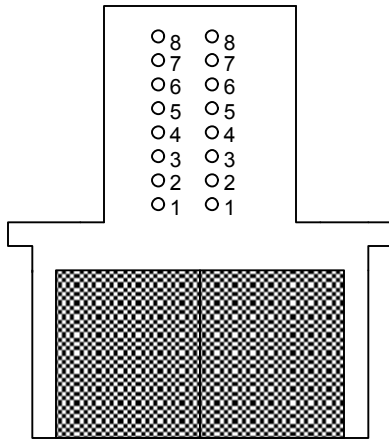

RJ-45 A RJ-45 B
 Mono Remote
 Audio Control
 Output

<u>RJ-45 Pin #</u>		<u>DB Pin #</u>	<u>Function</u>
RJ-45A	#1 →	4	+
	#2 →	5	-
	#5 →	1	Gnd
RJ-45B	#1 →	2	Squelch Relay
	#2 →	6	Squelch Relay
	#3 →	12	Decode Relay
	#4 →	15	Mute
	#5 →	8	Gnd
	#6 →	13	Decode Relay
	#7 →	3	Decode Level
	#8 →	11	Signal Level Out



The Studio Wiring Solution from

radio
 SYSTEMS

601 Heron Drive · Logan Township, NJ 08085
 856/467-8000 · 856/467-3044 Fax · sales@radiosystems.com
 www.radiosystems.com · www.studiohub.com

Hub Pin Outs

<u>Channel</u>	<u>Color Pair</u>	<u>RJ-45 Pin</u>	<u>110 Pin</u>
L+ / AES +	Wht/Org	1	3
L- / AES -	Org/Wht	2	4
R+	Wht/Grn	3	5
R-	Grn/Wht	6	6
nc	Wht/Blu	5	1
GND	Blu/Wht	4	2
15V-	Wht/Brn	7	7
15V+	Brn/Wht	8	8
Shield	Wht/Slt	Shield	9
Shield	Slt/Wht	Shield	10