


# P/N 12677

Configuration: DB 25 Male to Quad RJ-45

## Type CR

Application: Marshall AR-DM2B Monitor AES Inputs (4)

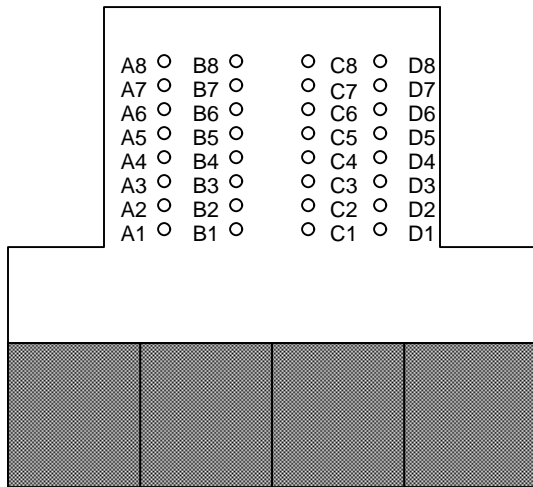

RJ-45 RJ-45 RJ-45 RJ-45  
A B C D

<u>RJ-45 Pin #</u>	<u>DB Pin #</u>	<u>Function</u>
RJ-45A #1	→ 24	AES 1+
RJ-45A #2	→ 12	AES 1-
RJ-45B #1	→ 10	AES 2+
RJ-45B #2	→ 23	AES 2-
RJ-45C #1	→ 21	AES 3+
RJ-45C #2	→ 9	AES 3-
RJ-45D #1	→ 7	AES 4+
RJ-45D #2	→ 20	AES 4-



*The Studio Wiring Solution from*

**radio**  
SYSTEMS

601 Heron Drive · Logan Township, NJ 08085  
856/467-8000 · 856/467-3044 Fax · [sales@radiosystems.com](mailto:sales@radiosystems.com)  
[www.radiosystems.com](http://www.radiosystems.com) · [www.studiohub.com](http://www.studiohub.com)

### Hub Pin Outs

<u>Channel</u>	<u>Color Pair</u>	<u>RJ-45 Pin</u>	<u>110 Pin</u>
L+ / AES +	Wht/Org	1	3
L- / AES -	Org/Wht	2	4
R+	Wht/Grn	3	5
R-	Grn/Wht	6	6
nc	Wht/Blu	5	1
GND	Blu/Wht	4	2
15V-	Wht/Brn	7	7
15V+	Brn/Wht	8	8
Shield	Wht/Slr	Shield	9
Shield	Slr/Wht	Shield	10