


P/N 12999

Configuration: DB 9 Female to Dual RJ-45

Type AO

Application: IDC Max Receiver Analog and AES Outputs

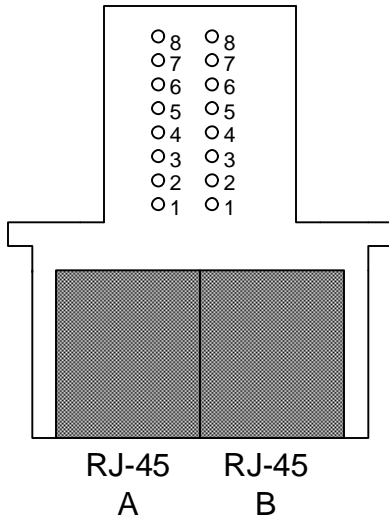

<u>RJ-45 Pin #</u>		<u>DB Pin #</u>	<u>Function</u>
RJ-45A (Analog)	#1 ←	1	L+
	#2 ←	6	L-
	#3 ←	5	R+
	#4 ←	4	Ground
	#6 ←	9	R-
RJ-45B (AES)	#1 ←	3	AES+
	#2 ←	8	AES-
	#4 ←	7	Ground



Hub Pin Outs		
<u>Channel</u>	<u>Color Pair</u>	<u>RJ-45 Pin</u>
L+ / AES +	Wht/Org	1
L- / AES -	Org/Wht	2
R+	Wht/Grn	3
R-	Grn/Wht	6
nc	Wht/Blu	5
GND	Blu/Wht	4
15V-	Wht/Brn	7
15V+	Brn/Wht	8
Shield	Wht/Slr	Shield
Shield	Slr/Wht	Shield