


# P/N 12660

Configuration: DB 15HD Male to Dual RJ-45

## Type AY

Application: Digigram VX222 Digital I/O

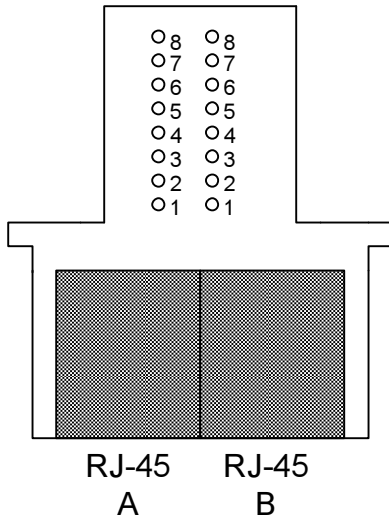

| <u>RJ-45 Pin #</u> |    | <u>DB Pin #</u> | <u>Function</u> |
|--------------------|----|-----------------|-----------------|
| RJ-45A             | #1 | → 14            | AES Out+        |
|                    | #2 | → 15            | AES Out-        |
| RJ-45B             | #1 | → 5             | AES In+         |
|                    | #2 | → 4             | AES In-         |



*The Studio Wiring Solution from*

**radio**  
SYSTEMS

601 Heron Drive · Logan Township, NJ 08085  
856/467-8000 · 856/467-3044 Fax · sales@radiosystems.com  
www.radiosystems.com · www.studiohub.com

### Hub Pin Outs

| <u>Channel</u> | <u>Color Pair</u> | <u>RJ-45 Pin</u> | <u>110 Pin</u> |
|----------------|-------------------|------------------|----------------|
| L+ / AES +     | Wht/Org           | 1                | 3              |
| L- / AES -     | Org/Wht           | 2                | 4              |
| R+             | Wht/Grn           | 3                | 5              |
| R-             | Grn/Wht           | 6                | 6              |
| nc             | Wht/Blu           | 5                | 1              |
| GND            | Blu/Wht           | 4                | 2              |
| 15V-           | Wht/Brn           | 7                | 7              |
| 15V+           | Brn/Wht           | 8                | 8              |
| Shield         | Wht/Slt           | Shield           | 9              |
| Shield         | Slt/Wht           | Shield           | 10             |