


P/N 12473

Configuration: DB 25 Male to Single RJ-45

Type LL

Application: Centuari Code Control I/O (TTL Data)

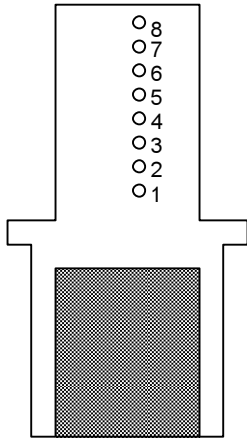

<u>RJ-45 Pin #</u>		<u>DB Pin #</u>	<u>Function</u>
RJ-45A	#1	→ 5	Output A
	#2	→ 6	Output B
	#3	→ 7	Output C
	#4	→ 8	Output D
	#5	→ 15	Input A
	#6	→ 13	Input B
	#7	→ 12	Input C
	#8	→ 10	Input D
Shield	S	→ 18	GND



The Studio Wiring Solution from



601 Heron Drive · Logan Township, NJ 08085
856/467-8000 · 856/467-3044 Fax · sales@radiosystems.com
www.radiosystems.com · www.studiohub.com

Hub Pin Outs

<u>Channel</u>	<u>Color Pair</u>	<u>RJ-45 Pin</u>	<u>110 Pin</u>
L+ / AES +	Wht/Org	1	3
L- / AES -	Org/Wht	2	4
R+	Wht/Grn	3	5
R-	Grn/Wht	6	6
nc	Wht/Blu	5	1
GND	Blu/Wht	4	2
15V-	Wht/Brn	7	7
15V+	Brn/Wht	8	8
Shield	Wht/Slt	Shield	9
Shield	Slt/Wht	Shield	10