


P/N 12504

Configuration: DB 15 Male to Dual RJ-45

Type RR

Applications: Digigram VX222 Analog I/O
& Digigram PCX-924 Analog I/O

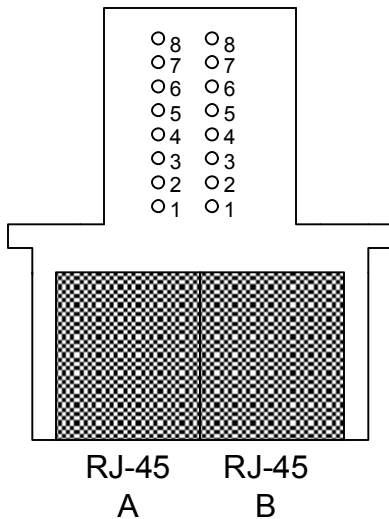

| <u>RJ-45 Pin #</u> | | <u>DB Pin #</u> | <u>Function</u> |
|--------------------|----|-----------------|-----------------|
| RJ-45A | #1 | → 10 | Left Out+ |
| | #2 | → 3 | Left Out- |
| | #3 | → 1 | Right Out+ |
| | #6 | → 9 | Right Out- |
| RJ-45B | #1 | → 7 | Left In+ |
| | #2 | → 15 | Left In- |
| | #3 | → 13 | Right In+ |
| | #6 | → 6 | Right In- |



The Studio Wiring Solution from

radio
SYSTEMS

601 Heron Drive · Logan Township, NJ 08085
856/467-8000 · 856/467-3044 Fax · sales@radiosystems.com
www.radiosystems.com · www.studiohub.com

Hub Pin Outs

| <u>Channel</u> | <u>Color Pair</u> | <u>RJ-45 Pin</u> | <u>110 Pin</u> |
|----------------|-------------------|------------------|----------------|
| L+ / AES + | Wht/Org | 1 | 3 |
| L- / AES - | Org/Wht | 2 | 4 |
| R+ | Wht/Grn | 3 | 5 |
| R- | Grn/Wht | 6 | 6 |
| nc | Wht/Blu | 5 | 1 |
| GND | Blu/Wht | 4 | 2 |
| 15V- | Wht/Brn | 7 | 7 |
| 15V+ | Brn/Wht | 8 | 8 |
| Shield | Wht/Slt | Shield | 9 |
| Shield | Slt/Wht | Shield | 10 |