


P/N 12338

Configuration: DB 25 Male to Quad RJ-45

Type P

Application: DAL to DAL

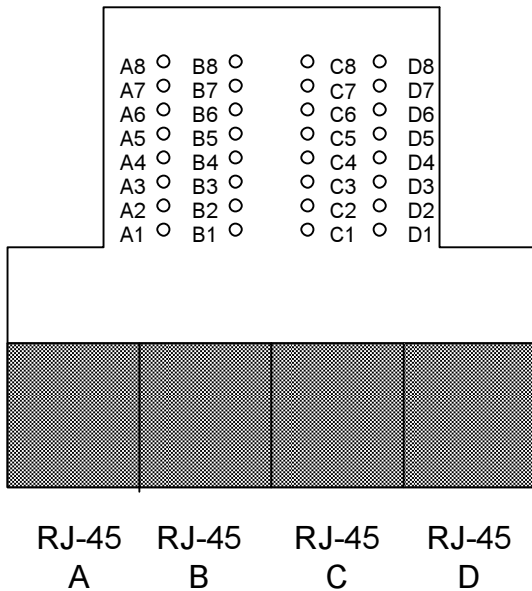

RJ-45 Pin #	DB Pin #	Function
RJ-45A #1	→ 1	N/A
RJ-45A #2	→ 2	N/A
RJ-45A #3	→ 3	N/A
RJ-45A #4	→ 4	N/A
RJ-45A #5	→ 5	N/A
RJ-45A #6	→ 6	N/A
RJ-45A #7	→ 14	N/A
RJ-45A #8	→ 15	N/A
RJ-45B #1	→ 7	N/A
RJ-45B #2	→ 8	N/A
RJ-45B #3	→ 18	N/A
RJ-45B #4	→ 19	N/A
RJ-45B #5	→ 20	N/A
RJ-45B #6	→ 21	N/A
RJ-45B #7	→ 16	N/A
RJ-45B #8	→ 17	N/A
RJ-45C #1	→ 22	N/A
RJ-45C #2	→ 23	N/A
RJ-45C #7	→ 9	N/A
RJ-45C #8	→ 10	N/A
RJ-45D #1	→ 24	N/A
RJ-45D #2	→ 25	N/A
RJ-45D #3	→ 11	N/A
RJ-45D #4	→ 12	N/A



The Studio Wiring Solution from

radio
SYSTEMS

601 Heron Drive · Logan Township, NJ 08085
856/467-8000 · 856/467-3044 Fax · sales@radiosystems.com
www.radiosystems.com · www.studiohub.com

Hub Pin Outs

Channel	Color Pair	RJ-45 Pin	110 Pin
L+ / AES +	Wht/Org	1	3
L- / AES -	Org/Wht	2	4
R+	Wht/Grn	3	5
R-	Grn/Wht	6	6
nc	Wht/Blu	5	1
GND	Blu/Wht	4	2
15V-	Wht/Brn	7	7
15V+	Brn/Wht	8	8
Shield	Wht/Slt	Shield	9
Shield	Slt/Wht	Shield	10