


P/N 12513

Configuration: DB 9 Male to Dual RJ-45

Type AB

Application: Antex SX-9/23 Analog I/O
ASI 5111 Analog I/O

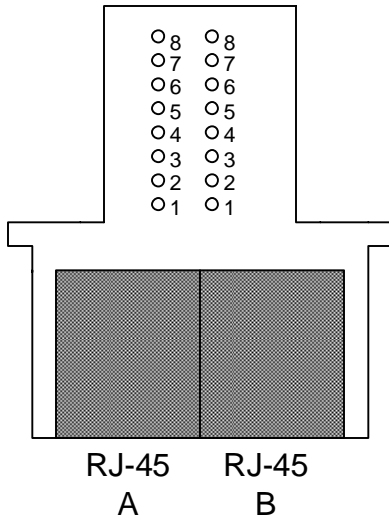

<u>RJ-45 Pin #</u>		<u>DB Pin #</u>	<u>Function</u>
RJ-45A	#1 →	9	L Out+
	#2 →	5	L Out-
	#3 →	8	R Out+
	#6 →	4	R Out-
RJ-45B	#1 →	7	L In+
	#2 →	3	L In-
	#3 →	6	R In+
	#6 →	2	R In-



The Studio Wiring Solution from



601 Heron Drive · Logan Township, NJ 08085
856/467-8000 · 856/467-3044 Fax · sales@radiosystems.com
www.radiosystems.com · www.studiohub.com

Hub Pin Outs

<u>Channel</u>	<u>Color Pair</u>	<u>RJ-45 Pin</u>	<u>110 Pin</u>
L+ / AES +	Wht/Org	1	3
L- / AES -	Org/Wht	2	4
R+	Wht/Grn	3	5
R-	Grn/Wht	6	6
nc	Wht/Blu	5	1
GND	Blu/Wht	4	2
15V-	Wht/Brn	7	7
15V+	Brn/Wht	8	8
Shield	Wht/Slr	Shield	9
Shield	Slr/Wht	Shield	10