


P/N 12914

Configuration: DB 25 Male to Quad RJ-45

Type CE

Application: Wheatstone SPD-8 Superphone I/O Ports Analog
(Upper DB-25 Only)

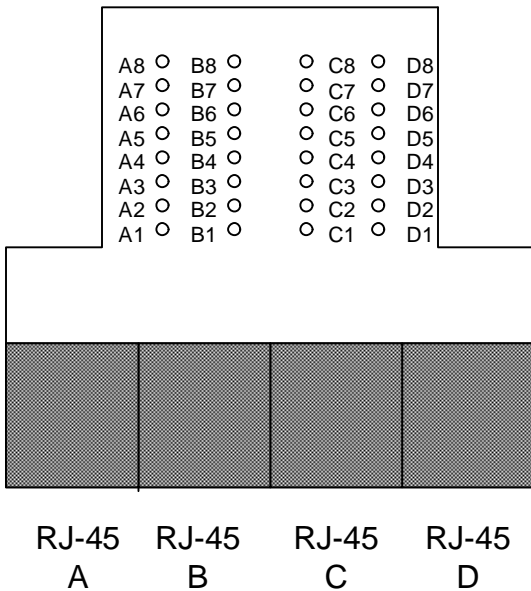

RJ-45 Pin #	DB Pin #	Function
RJ-45A	#1 → 24	EXT IN+
	#2 → 12	EXT IN-
	#3 → N/C	
	#6 → N/C	
RJ-45B	#1 → 21	Hybrid 1 IN+
	#2 → 9	Hybrid 1 IN-
	#3 → N/C	
	#6 → N/C	
RJ-45C	#1 → 7	Hybrid 2 IN+
	#2 → 20	Hybrid 2 IN-
	#3 → N/C	
	#6 → N/C	
RJ-45D	#1 → N/C	
	#2 → N/C	
	#3 → N/C	
	#6 → N/C	
SHIELD	S → 13	Audio Ground



The Studio Wiring Solution from

radio
SYSTEMS

601 Heron Drive · Logan Township, NJ 08085
856/467-8000 · 856/467-3044 Fax · sales@radiosystems.com
www.radiosystems.com · www.studiohub.com

Hub Pin Outs

Channel	Color Pair	RJ-45 Pin	110 Pin
L+ / AES +	Wht/Org	1	3
L- / AES -	Org/Wht	2	4
R+	Wht/Grn	3	5
R-	Grn/Wht	6	6
nc	Wht/Blu	5	1
GND	Blu/Wht	4	2
15V-	Wht/Brn	7	7
15V+	Brn/Wht	8	8
Shield	Wht/Slr	Shield	9
Shield	Slr/Wht	Shield	10