


# P/N 12667

Configuration: HD DB 26 Male to Quad RJ-45

## Type BZ

Application: Lynx AES16 - 3 Out, 1 In (4/4 Channel)

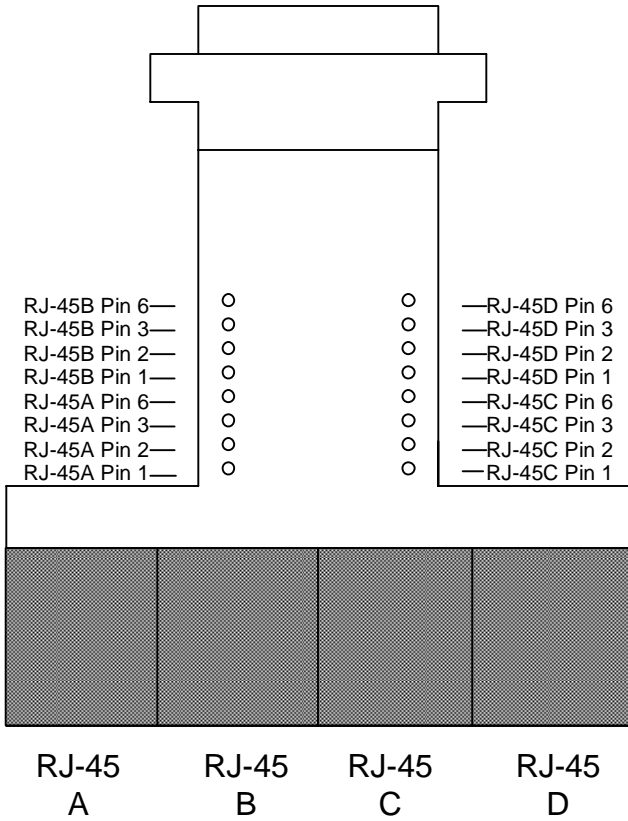

<u>RJ-45 Pin #</u>	<u>DB Pin #</u>	<u>Function</u>
RJ-45A #1	→ 22	Out 1+
RJ-45A #2	→ 14	Out 1-
RJ-45B #1	→ 13	Out 2+
RJ-45B #2	→ 4	Out 2-
RJ-45C #1	→ 20	Out 3+
RJ-45C #2	→ 12	Out 3-
RJ-45D #1	→ 26	In 1+
RJ-45D #2	→ 18	In 1-

### Hub Pin Outs

<u>Channel</u>	<u>Color Pair</u>	<u>RJ-45 Pin</u>	<u>110 Pin</u>
L+ / AES +	Wht/Org	1	3
L- / AES -	Org/Wht	2	4
R+	Wht/Grn	3	5
R-	Grn/Wht	6	6
nc	Wht/Blu	5	1
GND	Blu/Wht	4	2
15V-	Wht/Brn	7	7
15V+	Brn/Wht	8	8
Shield	Wht/Slr	Shield	9
Shield	Slr/Wht	Shield	10



The Studio Wiring Solution from



601 Heron Drive · Logan Township, NJ 08085  
 856/467-8000 · 856/467-3044 Fax · sales@radiosystems.com  
 www.radiosystems.com · www.studiohub.com