


# P/N 12857

Configuration: DB 9 Female to Dual RJ-45

## Type CD

Applications: Starguide Stereo Analog Audio  
Starguide III - \* Parallel Outputs \*

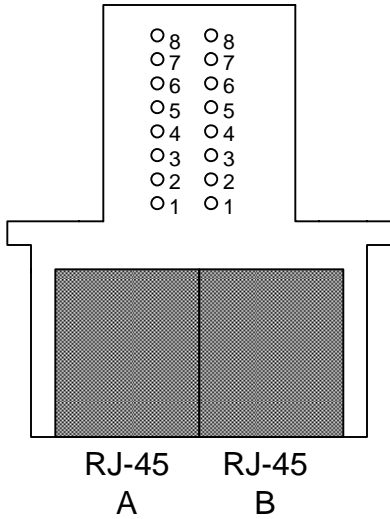

<u>RJ-45 Pin #</u>		<u>DB Pin #</u>	<u>Function</u>
RJ-45A	#1	→ 1	L+
	#2	→ 6	L-
	#3	→ 5	R+
	#6	→ 9	R-
RJ-45B	#1	→ 1	L+
	#2	→ 6	L-
	#3	→ 5	R+
	#6	→ 9	R-



*The Studio Wiring Solution from*

**radio**  
SYSTEMS

601 Heron Drive · Logan Township, NJ 08085  
856/467-8000 · 856/467-3044 Fax · sales@radiosystems.com  
www.radiosystems.com · www.studiohub.com

### Hub Pin Outs

<u>Channel</u>	<u>Color Pair</u>	<u>RJ-45 Pin</u>	<u>110 Pin</u>
L+ / AES +	Wht/Org	1	3
L- / AES -	Org/Wht	2	4
R+	Wht/Grn	3	5
R-	Grn/Wht	6	6
nc	Wht/Blu	5	1
GND	Blu/Wht	4	2
15V-	Wht/Brn	7	7
15V+	Brn/Wht	8	8
Shield	Wht/Slr	Shield	9
Shield	Slr/Wht	Shield	10