


# P/N 12335

Configuration: DB 9 Male to Dual RJ-45

## Type H

Application: Klotz Vadis Input (for a V-240 module)  
& BE AV-100 Digital Daughter Card

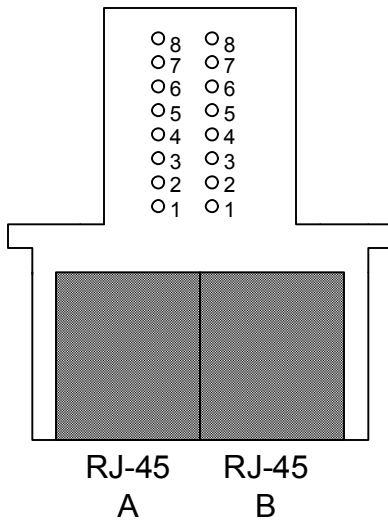

<u>RJ-45 Pin #</u>		<u>DB Pin #</u>	<u>Function</u>
RJ-45A	#1 →	1	AES 1+
	#2 →	6	AES 1-
RJ-45B	#1 →	3	AES 2+
	#2 →	8	AES 2-



*The Studio Wiring Solution from*

**radio**  
**SYSTEMS**

601 Heron Drive · Logan Township, NJ 08085  
856/467-8000 · 856/467-3044 Fax · [sales@radiosystems.com](mailto:sales@radiosystems.com)  
[www.radiosystems.com](http://www.radiosystems.com) · [www.studiohub.com](http://www.studiohub.com)

### Hub Pin Outs

<u>Channel</u>	<u>Color Pair</u>	<u>RJ-45 Pin</u>	<u>110 Pin</u>
L+ / AES +	Wht/Org	1	3
L- / AES -	Org/Wht	2	4
R+	Wht/Grn	3	5
R-	Grn/Wht	6	6
nc	Wht/Blu	5	1
GND	Blu/Wht	4	2
15V-	Wht/Brn	7	7
15V+	Brn/Wht	8	8
Shield	Wht/Slt	Shield	9
Shield	Slt/Wht	Shield	10