


# P/N 12497

Configuration: DB 25 Male to Quad RJ-45

## Type PP

Application: Wheatstone ADO-2001 Analog Router Output  
& Wheatstone ADI-2001 Analog Router Input

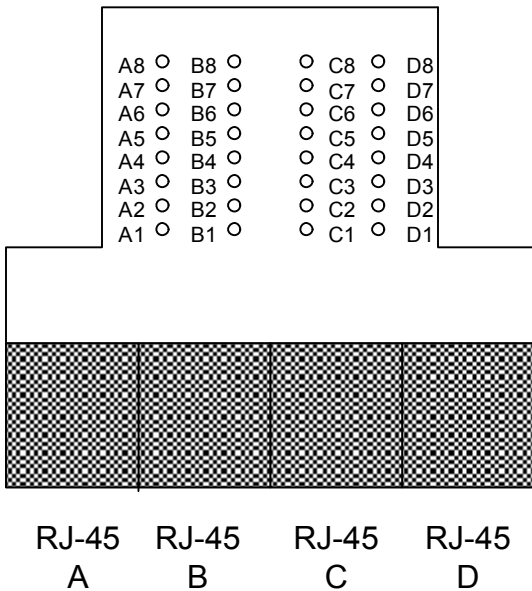

RJ-45 Pin #	DB Pin #	Function
RJ-45A	#1 → 24	Audio 1+
	#2 → 12	Audio 1-
	#3 → 10	Audio 2+
	#6 → 23	Audio 2-
RJ-45B	#1 → 21	Audio 3+
	#2 → 9	Audio 3-
	#3 → 7	Audio 4+
	#6 → 20	Audio 4-
RJ-45C	#1 → 18	Audio 5+
	#2 → 6	Audio 5-
	#3 → 4	Audio 6+
	#6 → 17	Audio 6-
RJ-45D	#1 → 15	Audio 7+
	#2 → 3	Audio 7-
	#3 → 1	Audio 8+
	#6 → 14	Audio 8-



The Studio Wiring Solution from

**radio**  
SYSTEMS

601 Heron Drive · Logan Township, NJ 08085  
856/467-8000 · 856/467-3044 Fax · [sales@radiosystems.com](mailto:sales@radiosystems.com)  
[www.radiosystems.com](http://www.radiosystems.com) · [www.studiohub.com](http://www.studiohub.com)

### Hub Pin Outs

Channel	Color Pair	RJ-45 Pin	110 Pin
L+ / AES +	Wht/Org	1	3
L- / AES -	Org/Wht	2	4
R+	Wht/Grn	3	5
R-	Grn/Wht	6	6
nc	Wht/Blu	5	1
GND	Blu/Wht	4	2
15V-	Wht/Brn	7	7
15V+	Brn/Wht	8	8
Shield	Wht/Slt	Shield	9
Shield	Slt/Wht	Shield	10