


P/N 12418

Configuration: DB 15 Male to Quad RJ-45

Type U

Application: Klotz Vadis Stereo / Mono Input

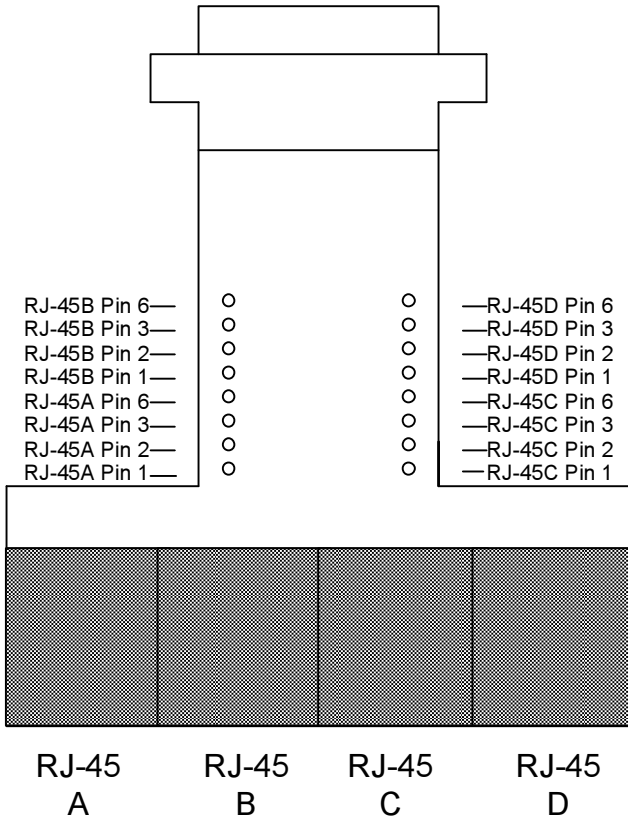

RJ-45 Pin #	DB Pin #	Function
RJ-45A	#1 → 1	Ch1+
	#2 → 9	Ch1-
RJ-45B	#1 → 3	Ch2+
	#2 → 11	Ch2-
RJ-45C	#1 → 5	Ch3+
	#2 → 13	Ch3-
RJ-45D	#1 → 7	Ch4+
	#2 → 15	Ch4-

Hub Pin Outs

Channel	Color Pair	RJ-45 Pin	110 Pin
L+ / AES +	Wht/Org	1	3
L- / AES -	Org/Wht	2	4
R+	Wht/Grn	3	5
R-	Grn/Wht	6	6
nc	Wht/Blu	5	1
GND	Blu/Wht	4	2
15V-	Wht/Brn	7	7
15V+	Brn/Wht	8	8
Shield	Wht/Slt	Shield	9
Shield	Slt/Wht	Shield	10



The Studio Wiring Solution from

radio
SYSTEMS

601 Heron Drive · Logan Township, NJ 08085
856/467-8000 · 856/467-3044 Fax · sales@radiosystems.com
www.radiosystems.com · www.studiohub.com