


P/N 12983

Configuration: DB 25 Male to Quad RJ-45

Type BS

Application: Wheatstone D8000 DMTR-8 Meter Output (lower connector only)

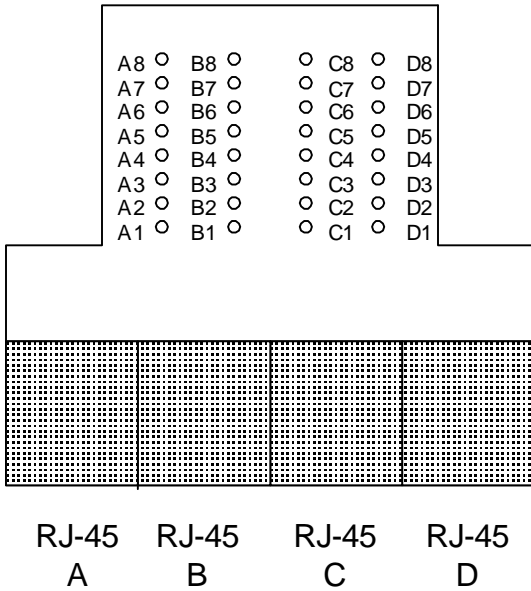

RJ-45 Pin #	DB Pin #	Function
RJ-45A	#1 → 18	EXT 1 L+
	#2 → 6	EXT 1 L-
	#3 → 4	EXT 1 R+
	#6 → 17	EXT 1 R-
RJ-45B	#1 → 15	EXT 2 L+
	#2 → 3	EXT 2 L-
	#3 → 1	EXT 2 R+
	#6 → 14	EXT 2 R-
RJ-45C	#1 → 24	AES 1 +
	#2 → 12	AES 1 -
	#3 → N/C	N/A
	#6 → N/C	N/A
RJ-45D	#1 → 10	AES 2 +
	#2 → 23	AES 2 -
	#3 → N/C	N/A
	#6 → N/C	N/A



The Studio Wiring Solution from



601 Heron Drive · Logan Township, NJ 08085
 856/467-8000 · 856/467-3044 Fax · sales@radiosystems.com
www.radiosystems.com · www.studiohub.com

Hub Pin Outs

Channel	Color Pair	RJ-45 Pin	110 Pin
L+ / AES +	Wht/Org	1	3
L- / AES -	Org/Wht	2	4
R+	Wht/Grn	3	5
R-	Grn/Wht	6	6
nc	Wht/Blu	5	1
GND	Blu/Wht	4	2
15V-	Wht/Brn	7	7
15V+	Brn/Wht	8	8
Shield	Wht/Slr	Shield	9
Shield	Slr/Wht	Shield	10