


# P/N 12915

Configuration: DB 25 Male to Quad RJ-45

## Type CF

Application: Wheatstone SPD-8 Superphone I/O Ports Analog/ Logic  
(Lower DB-25 Only)

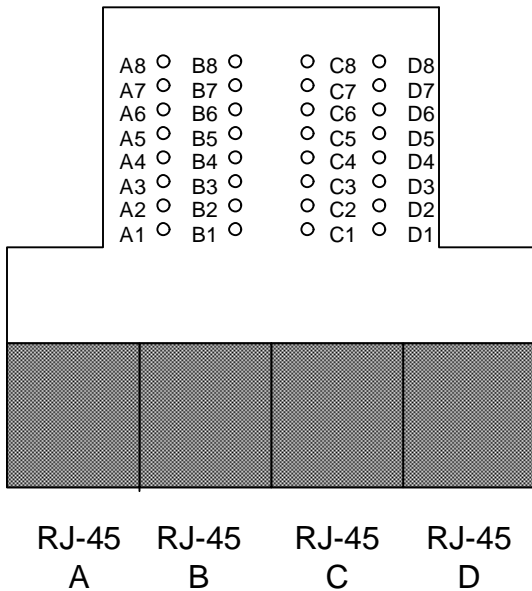

RJ-45 Pin #	DB Pin #	Function
RJ-45A	#1 → 24	Composite Out+
	#2 → 12	Composite Out-
	#3 → N/C	
	#6 → N/C	
RJ-45B	#1 → 10	Composite Minus Callers Out+
	#2 → 23	Composite Minus Callers Out-
	#3 → N/C	
	#6 → N/C	
RJ-45C	#1 → 7	Hybrid 1 Out+
	#2 → 20	Hybrid 1 Out-
	#3 → N/C	
	#6 → N/C	
RJ-45D	#1 → 18	Hybrid 2 Out+
	#2 → 6	Hybrid 2 Out-
	#3 → N/C	
	#6 → N/C	
SHIELD	S → 13	Audio Ground



The Studio Wiring Solution from

**radio**  
SYSTEMS

601 Heron Drive · Logan Township, NJ 08085  
856/467-8000 · 856/467-3044 Fax · [sales@radiosystems.com](mailto:sales@radiosystems.com)  
[www.radiosystems.com](http://www.radiosystems.com) · [www.studiohub.com](http://www.studiohub.com)

### Hub Pin Outs

Channel	Color Pair	RJ-45 Pin	110 Pin
L+ / AES +	Wht/Org	1	3
L- / AES -	Org/Wht	2	4
R+	Wht/Grn	3	5
R-	Grn/Wht	6	6
nc	Wht/Blu	5	1
GND	Blu/Wht	4	2
15V-	Wht/Brn	7	7
15V+	Brn/Wht	8	8
Shield	Wht/Slit	Shield	9
Shield	Slit/Wht	Shield	10