


P/N 12508

Configuration: DB 25 Male to Quad RJ-45 Type UU

Application: Wheatstone D5000 OMD-6 Digital Out

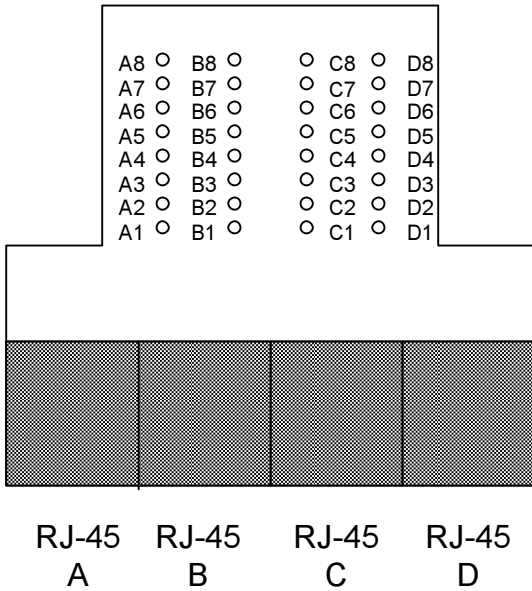

RJ-45 Pin #	DB Pin #	Function
RJ-45A #1	→ 1	Pgm 1+
RJ-45A #2	→ 14	Pgm 1-
RJ-45B #1	→ 18	Pgm 3+
RJ-45B #2	→ 6	Pgm 3-
RJ-45C #1	→ 15	Aux 1+
RJ-45C #2	→ 3	Aux 1-
RJ-45D #1	→ 7	Aux 2+
RJ-45D #2	→ 20	Aux 2-

Hub Pin Outs

Channel	Color Pair	RJ-45 Pin	110 Pin
L+ / AES +	Wht/Org	1	3
L- / AES -	Org/Wht	2	4
R+	Wht/Grn	3	5
R-	Grn/Wht	6	6
nc	Wht/Blu	5	1
GND	Blu/Wht	4	2
15V-	Wht/Brn	7	7
15V+	Brn/Wht	8	8
Shield	Wht/Slt	Shield	9
Shield	Slt/Wht	Shield	10



The Studio Wiring Solution from



601 Heron Drive · Logan Township, NJ 08085
856/467-8000 · 856/467-3044 Fax · sales@radiosystems.com
www.radiosystems.com · www.studiohub.com